


Annexure for Tender Case No. 61/15/6237

9001-22321C00A

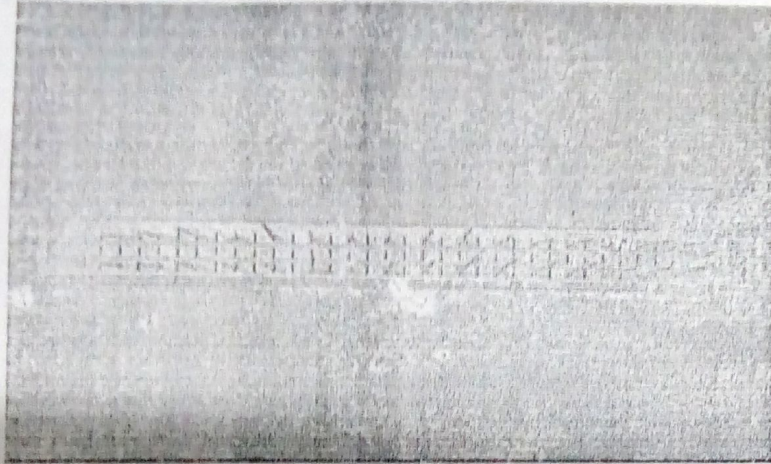

Description of DIN 41612 Type C Female 32 Way Straight Pin Row A + C

D type DIN41612 connector	
Female	9001-22321C00A
Material	
Housing	PBT+30%PC UL94V-0
Contacts	
Female	Phosphor Bronze
Electrical	
Current Rating	2A
Dielectric Withstanding Voltage	AC 1000V(r.m.s)/60s
Insulation Resistance	1000MO Min
Contact Resistance	20mO Max
Operating Temperature	-55°C~+125°C

27.01.15
तयि अनुभाग अधिष्ठाता (पुनर्निर्माण)
हावड़ा, (पूर्व रेलवे)
हावड़ा

CSF/Tele/Store/HWH